

10/585685
2-23-09

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 October 2005 (13.10.2005)


PCT

(10) International Publication Number
WO 2005/096044 A1

- (51) International Patent Classification⁷: **G02B 6/00** (74) Agent: SANTOPIETRO, Lols, A.; E. I. Du Pont De Nemours And Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, Delaware 19805 (US).
- (21) International Application Number: PCT/US2005/009288 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 21 March 2005 (21.03.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/555,576 23 March 2004 (23.03.2004) US (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (for all designated States except US): E.I. DUPONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, Delaware 19898 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): CLARY, Donald, B. [US/US]; 6939 Purple Ridge Drive, Rancho Palos Verdes, California 90275 (US).

[Continued on next page]

(54) Title: THERMAL MANAGEMENT OF LAMPS IN A BACKLIGHT SYSTEM

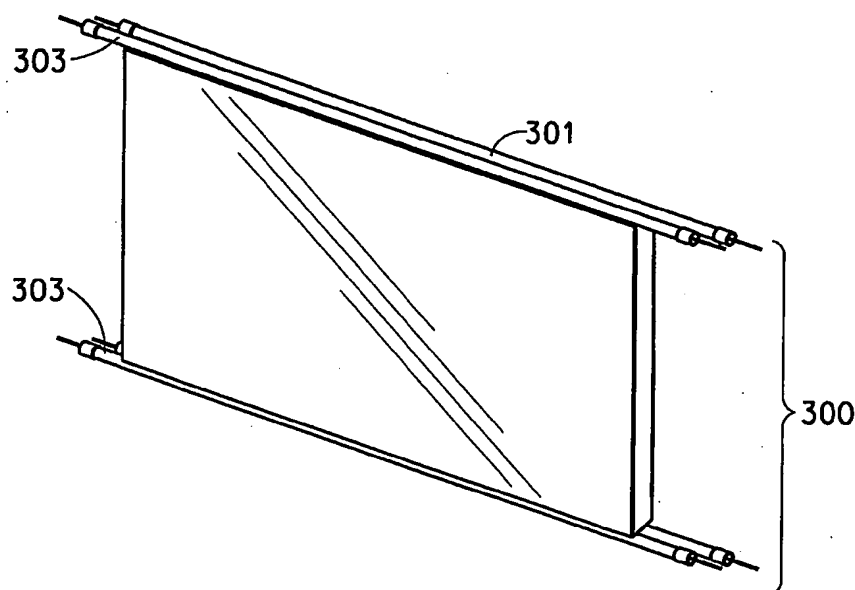

(57) Abstract: A backlight system (300) having at least two juxtaposed cold cathode lamps (302) wherein the lamps comprise cathodes at each end and wherein the lamps are positioned in a manner that the cathodes are not touching. The lamps (302) could be longitudinally offset or one of lamps (302) may be shorter than the other lamp(s) resulting in the cathodes not touching.

WO 2005/096044 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.